

CORUS MC1-LAN8

1U Rack Mount, Intel 6th / 7th, 8*LAN




Features

- Intel® LGA1151 6th/7th i3/i5/i7 processor
- Intel® Q270/Q250 Express chipset
- 2*DDR4 SODIMM 2400MHz, up to 64GB
- 8*Intel I210 Gigabit Ethernet
- 2*USB3.0, 1*VGA
- 1U AC220V ATX PSU 250W
- 1U standard chassis
- 4*SFP / 2*SFP optional

Model No.	MC1-LAN8	
Chassis	Material/Structure	1U standard, high quality galvanized case
	Color	Iron gray
	Dimension	430*320*44.5mm (L*W*H)
	Installation	1U rack mount
Motherboard	CPU	Support Intel® LGA1151 6th/7th Celeron/Pentium/Core i3/i5/i7 series processor
	Chipset	Intel Q270/Q250 Express chipset
	Graphics	Integrated Intel® HD Graphics
	Memory	2*DDR4 SODIMM RAM slot, 2400MHz, up to 64GB
Front I/O Port	POWER	1* Power button, 1*Reset button
	USB	2*USB3.0
	LAN	8*Intel I210 Gigabit LAN port, support WOL/PXE (LAN1-4 can support BYPASS, optional) LAN8 / WiFi optional, default LAN8
	SFP (optional)	4 * SFP / 2*SFP (expansion)
	COM	1*RJ45 COM port
	LED	1* HDD LED, 1* Power LED
Rear I/O Port	Display	1*VGA
	Power	1*AC power connector
Storage	SATA	1*3.5" SATA hard disk or 1*2.5" SATA hard disk
	MSATA	1*MSATA, transfer speed up to 6Gbps
Expansion	PCIE x8	1*PCIE x8 slot, for 1G/10G SFP expansion
	MINIPCIE	1*MINIPCIE slot, support WiFi/4G
	USB	1* internal USB2.0, can connect USB dongle
OS Support	Windows	Windows 7 /10 - Windows 2019 Server 64 bits
	Linux	Ubuntu
Power Supply	Power Type	Built-in ATX/1U PSU
	Voltage Input	AC 110-220V
	Consumption	250W
Environment	Working Temp.	-10°C ~ 50°C (with SSD)
	Storage Temp.	-20°C ~ 70°C
	Relative Humidity	5%-95% relative humidity, non-condensing
	Vibration	0.5g rms/5-500HZ/random/operating

Les spécifications indiquées peuvent être modifiées sans préavis – Photos non contractuelles

MC1-LAN8 Dimension

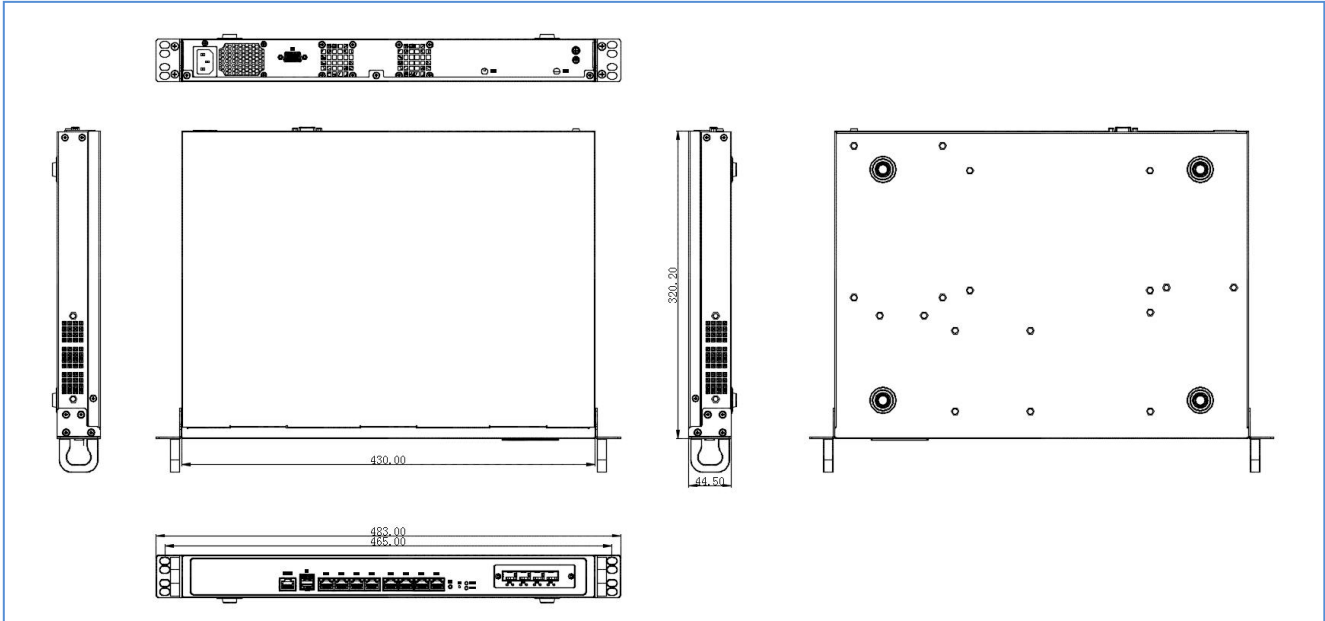

Front I/O View



Rear I/O View

